



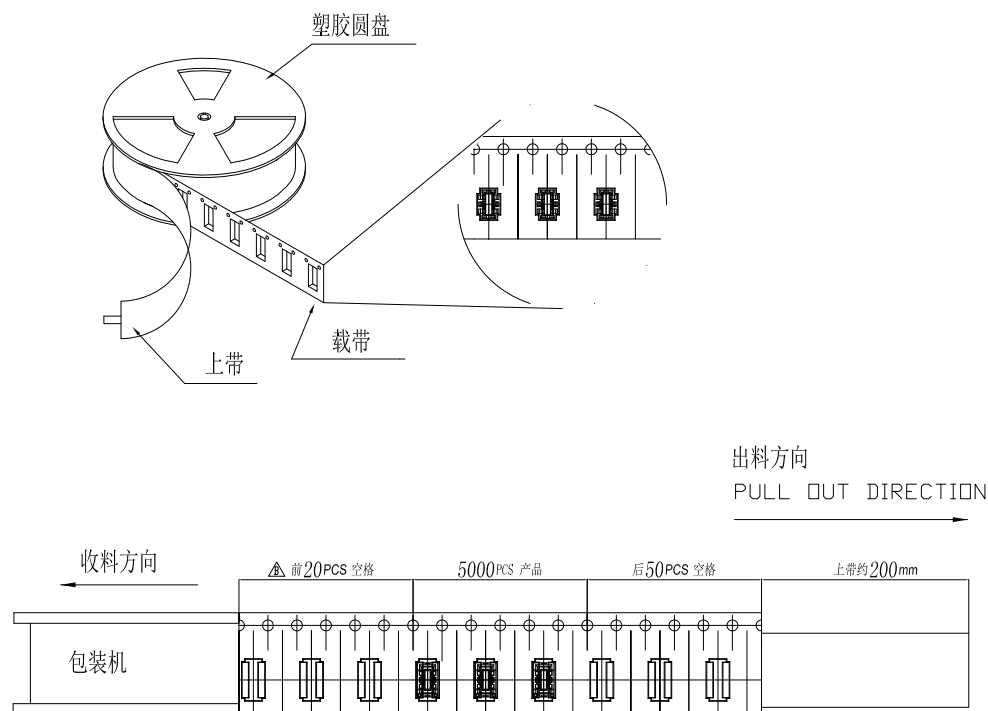


管制重点:

1. 包装时产品轻拿轻放, 避免产品变形.
2. 整盘包装好后, 检查是否有漏装, 产品的放置方向是否正确.
3. 包装载带断裂时不可用人工连接.
4. 检查是否有产品被压死, 检查整摞层数是否正确.
5. 若有未装满之零数箱, 须以缓冲材塞满.
6. 防水袋封口须密封.
7. 整箱封好后, 检查标签是否贴好, 干净, 字迹清晰, 标签内容是否正确, 完善.
8. 外纸箱: 内尺寸L340*W340*H315mm

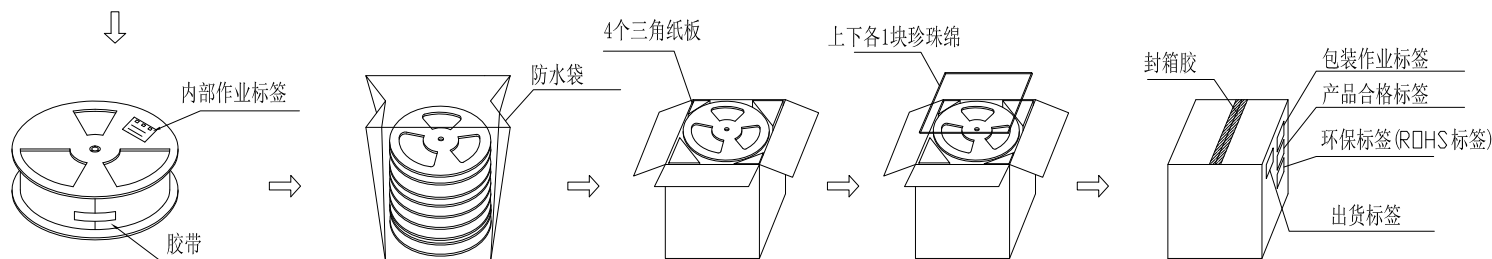


							GENERAL TOLERANCE X ±0.30 XX ±0.20 XXX ±0.10	 昆旺精密连接器有限公司 VIGORCONN PRECISION CONNECTOR CO., LTD				PART NO. LS600-004-02M			
												TITLE. BTB PLUG BATTERY CONN H0.75 8PIN			
								APPROVAL	CHECK	DRAWN	DATA	UNIT	SCALE	NUMBER	REV
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT 	Kim. Huang	Jova	Hekewei	2019/04/27	MM	1 : 1	A-000	A

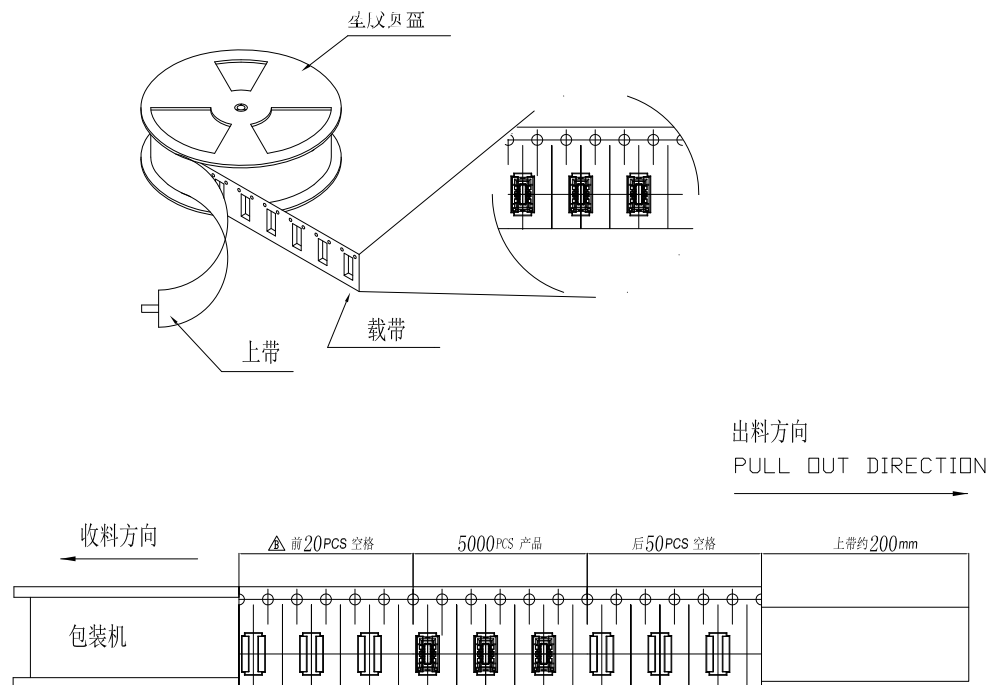

管制重点:

1. 包装时产品轻拿轻放, 避免产品变形.
2. 整盘包装好后, 检查是否有漏装, 产品的放置方向是否正确.
3. 包装载带断裂时不可用人工连接.
4. 检查是否有产品被压死, 检查整摞层数是否正确.
5. 若有未装满之零数箱, 须以缓冲材塞满.
6. 防水袋封口须密封.
7. 整箱封好后, 检查标签是否贴好, 干净, 字迹清晰, 标签内容是否正确, 完善.
8. 外纸箱: 内尺寸L340*W340*H315mm

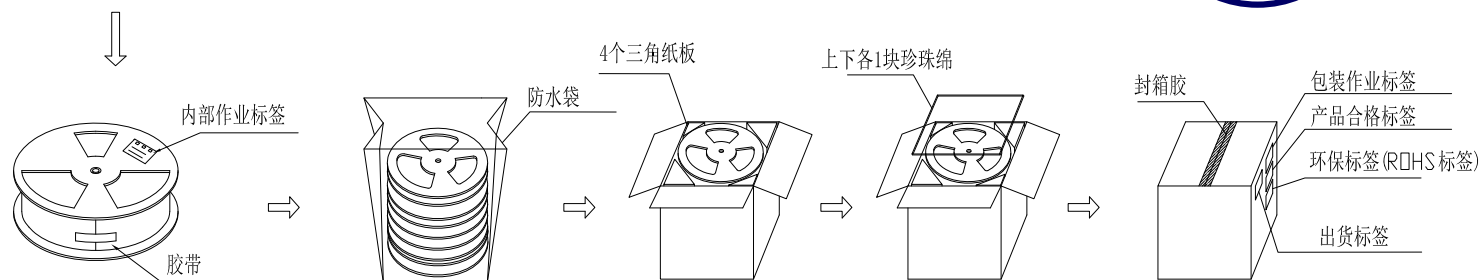

							GENERAL TOLERANCE X ±0.30 XX ±0.20 XXX ±0.10	 昆旺精密连接器有限公司 VIGORCONN PRECISION CONNECTOR CO., LTD				PART NO. LS600-004-02M			
												TITLE. BTB PLUG BATTERY CONN 			