

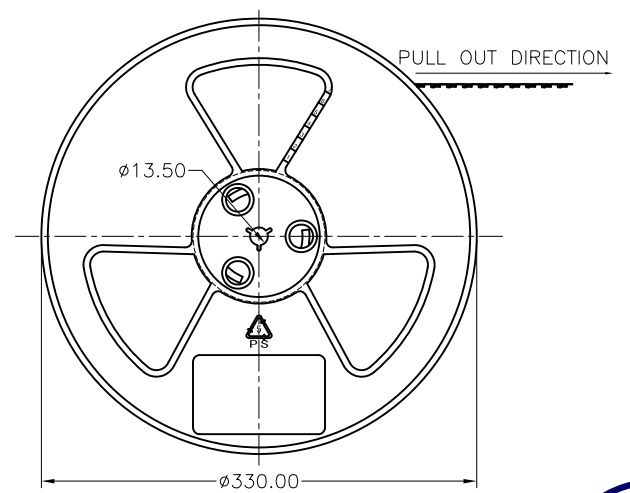
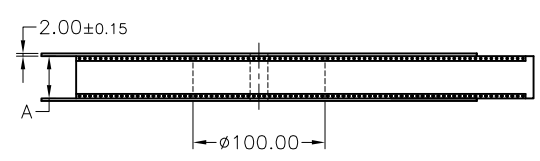
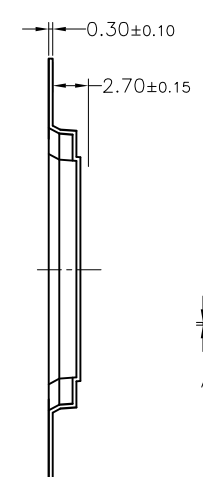


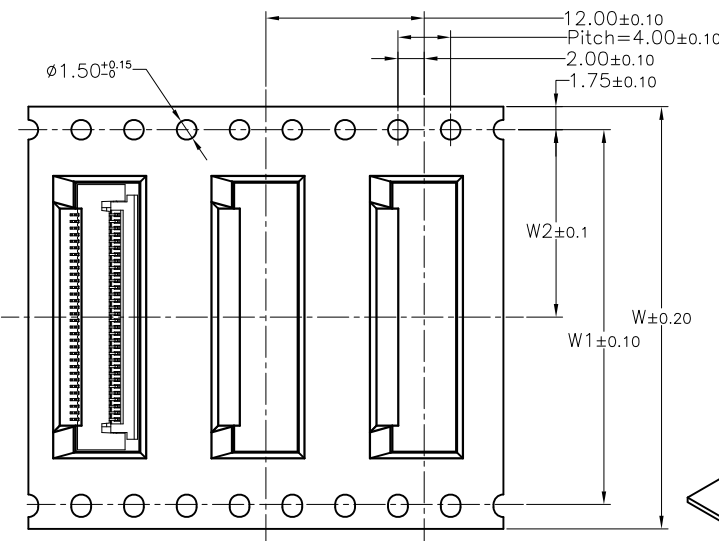

- NOTES:
- 1.10 Sprocket hole pitch cumulative tolerance ± 0.20 .
 2. Carrier camber is within 1mm in 100mm.
 3. Material: black conductive polystyrene alloy.
 4. All dimensions meet EIA-481-3 requirements.
 5. For tape width (dimension A) 16 and 24mm a pilot hole is provided on one side.
For tape width (dimension A) 32 and 44 and 56mm pilot holes are provided on both sides.

DESCRIPTION	0.5mm Pitch FPC CONNECTOR				
DIM: W	16	24	32	44	56
DIM: W1			28.4	40.4	52.4
DIM: W2	7.5	11.5	14.2	20.2	26.2
PCS/REEL	2000				
REEL/BOX	15	10	8	6	5
BOX (PCS)	30000	20000	16000	12000	10000
CTN SIZE	350*345*320				

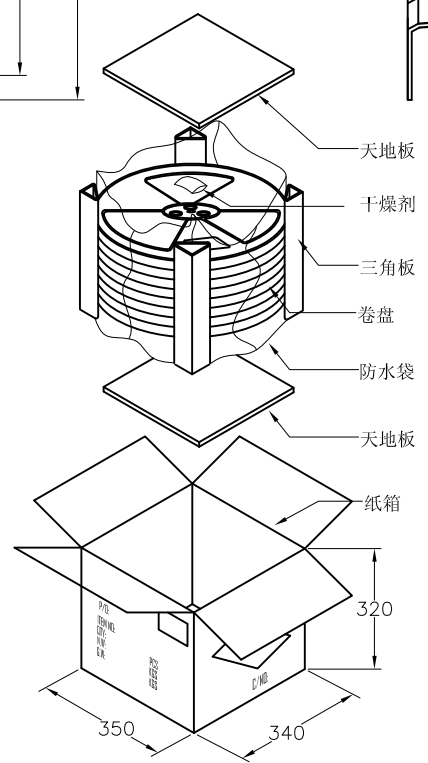

							GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	 昆旺精密连接器有限公司 VIGORCONN PRECISION CONNECTOR CO., LTD	PART NO. F61XXX-H1XX0						
									TITLE. FPC CONN. 0.5P H1.2 SLIDE TYPE UPPER CONTACT						
									APPROVAL	CHECK	DRAWN	DATA			
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT 		Kim Huang	Jova Lau	Wuxiaotao	2014/04/20	UNIT MM	SCALE 1 : 1	NUMBER A-000