

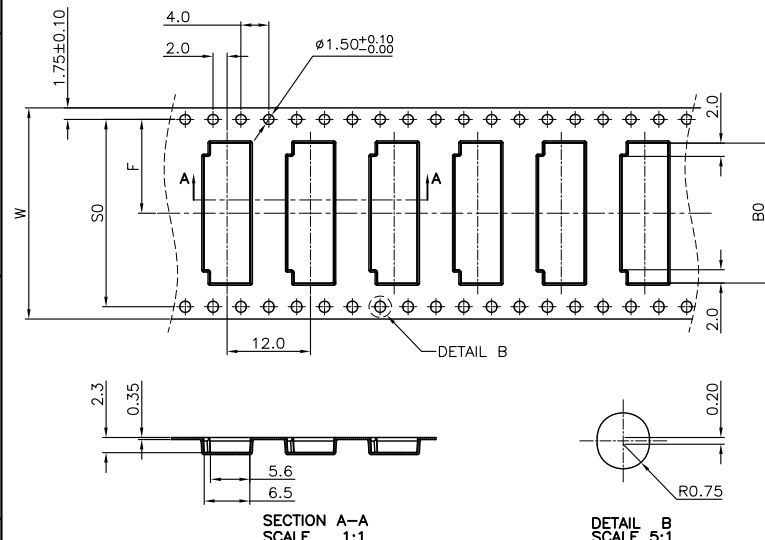


F
E
D
C
B
A

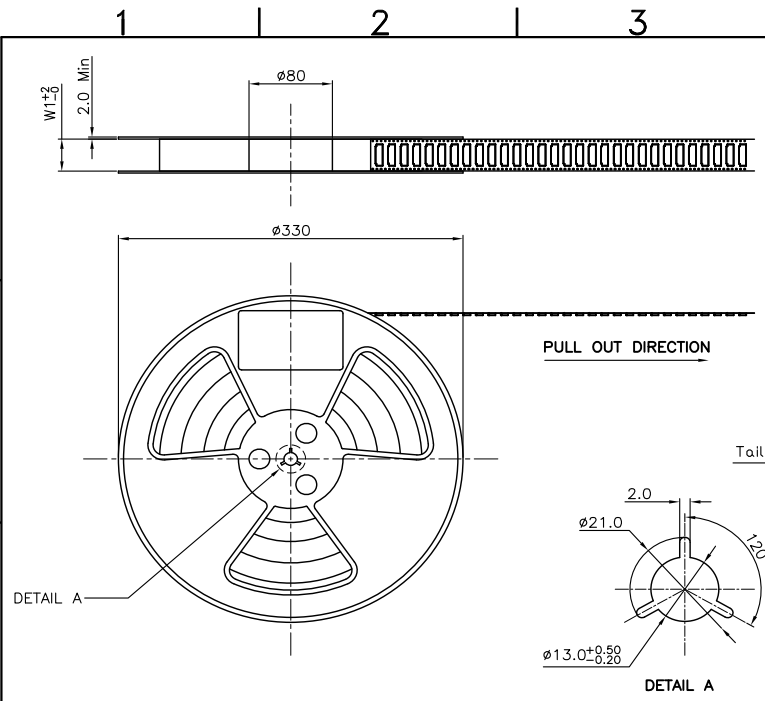

- NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE.±0.20mm
 2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
 3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
 4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
 5. THICKNESS: 0.35 ± 0.05 mm.
 6. PACKING LENGTH PER 13" REEL : 24.60METERS.
 7. COMPONENT LOAD PER 13" REEL : 2000PCS.
 8. PEELING OFF FORCE OF TOP TAPE 0.1N~0.7N(10.2gf~100gf).

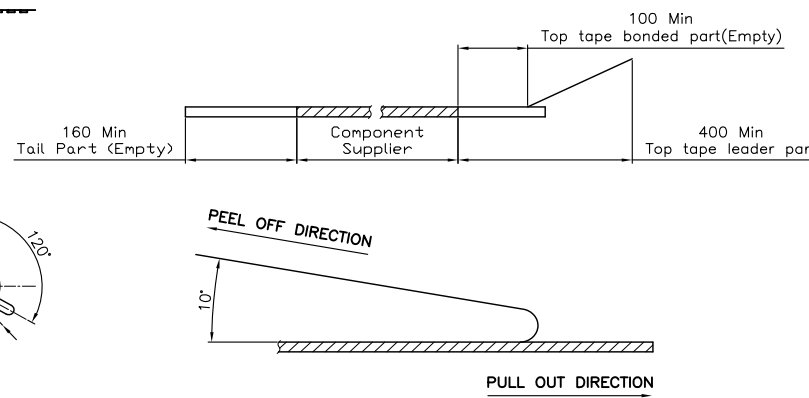

CKTS	B0±0.10	W	W1	F	S0±0.10
4	6.70	16+0.3/-0	16.4	7.5±0.10	单边孔
5	7.20				
6	7.70				
7	8.20				
8	8.70	24+0.3/-0	24.4	11.5±0.10	
9	9.20				
10	9.70				
11	10.20				
12	10.70	32±0.30	32.4	14.2±0.10	28.4
13	11.20				
14	11.70				
15	12.20				
16	12.70	44±0.30	44.4	20.2±0.15	40.4
17	13.20				
18	13.70				
19	14.20				
20	14.70	56±0.30	56.4	26.2±0.15	52.4
21	15.20				
22	15.70				
23	16.20				
24	16.70	60	60.0		
25	17.20				
26	17.70				
27	18.20				
28	18.70	60	60.0		
29	19.20				
30	19.70				
31	20.20				
32	20.70	60	60.0		
33	21.20				
34	21.70				
35	22.20				
36	22.70	60	60.0		
37	23.20				
38	23.70				
39	24.20				
40	24.70	60	60.0		
41	25.20				
42	25.70				
43	26.20				
44	26.70	60	60.0		
45	27.20				
46	27.70				
47	28.20				
48	28.70	60	60.0		
49	29.20				
50	29.70				
51	30.20				
52	30.70	60	60.0		
53	31.20				
54	31.70				
55	32.20				
56	32.70	60	60.0		
57	33.20				
58	33.70				
59	34.20				
60	34.70	60	60.0		

F
E
D
C
B
A

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT	Kim Huang	Jova Lau	Wuxiaotao	2014/04/20	UNIT	SCALE	NUMBER	REV
												MM	1:1	A-000	A