

F



E

D



C

B

A

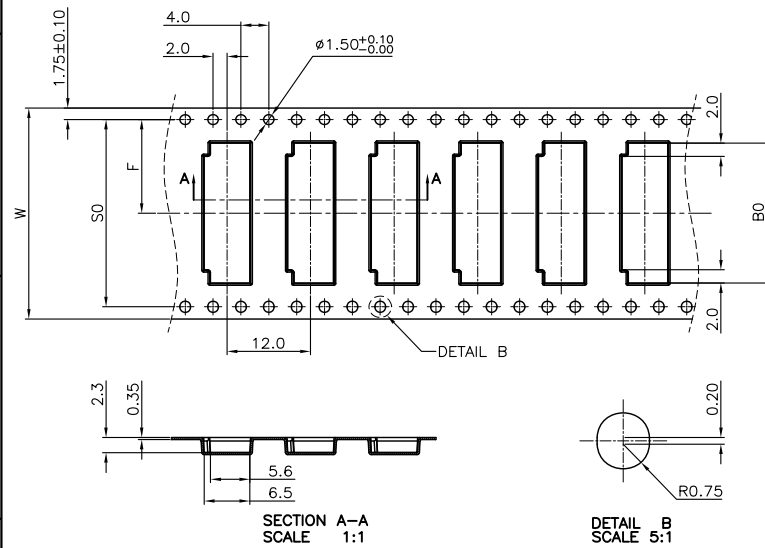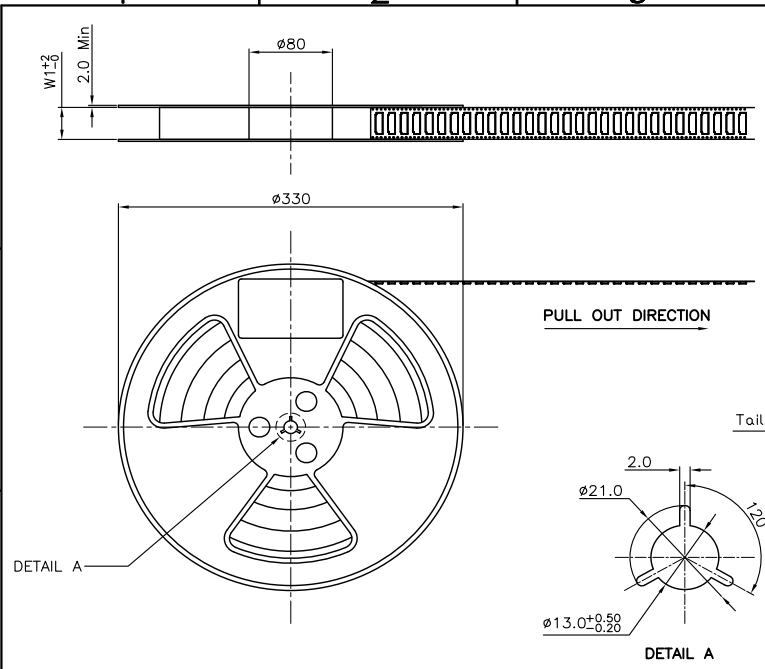

- NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE.±0.20mm
 2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
 3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
 4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
 5. THICKNESS: 0.35 ± 0.05 mm.
 6. PACKING LENGTH PER 13" REEL : 24.60METERS.
 7. COMPONENT LOAD PER 13" REEL : 2000PCS.
 8. PEELING OFF FORCE OF TOP TAPE 0.1N~0.7N(10.2gf~100gf).

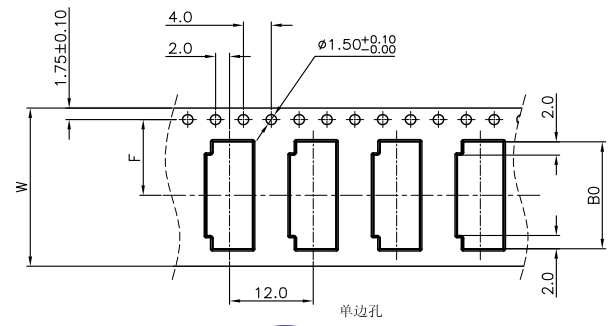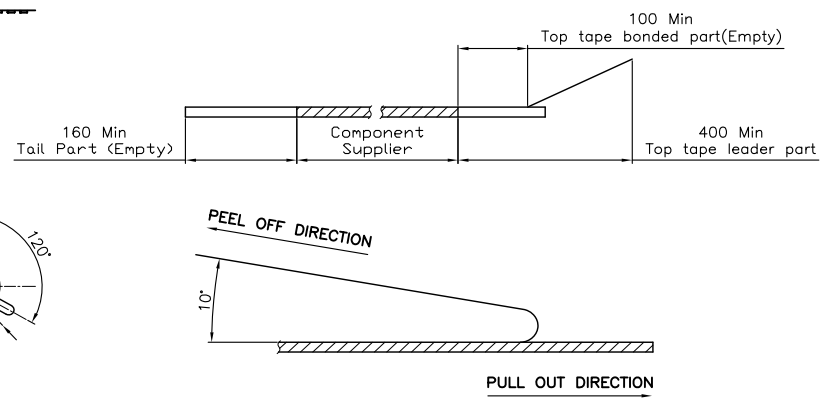

CKTS	B0±0.10	W	W1	F	S0±0.10
4	6.70	16+0.3/-0	16.4	7.5±0.10	单边孔
5	7.20				
6	7.70				
7	8.20				
8	8.70				
9	9.20	24+0.3/-0	24.4	11.5±0.10	
10	9.70				
11	10.20				
12	10.70				
13	11.20				
14	11.70	32±0.30	32.4	14.2±0.10	28.4
15	12.20				
16	12.70				
17	13.20				
18	13.70				
19	14.20	44±0.30	44.4	20.2±0.15	40.4
20	14.70				
21	15.20				
22	15.70				
23	16.20				
24	16.70	56±0.30	56.4	26.2±0.15	52.4
25	17.20				
26	17.70				
27	18.20				
28	18.70				
29	19.20	68±0.30	68.4	32.2±0.15	68.4
30	19.70				
31	20.20				
32	20.70				
33	21.20				
34	21.70	80±0.30	80.4	38.2±0.15	84.4
35	22.20				
36	22.70				
37	23.20				
38	23.70				
39	24.20	92±0.30	92.4	44.2±0.15	92.4
40	24.70				
41	25.20				
42	25.70				
43	26.20				
44	26.70	104±0.30	104.4	50.2±0.15	100.4
45	27.20				
46	27.70				
47	28.20				
48	28.70				
49	29.20	116±0.30	116.4	56.2±0.15	108.4
50	29.70				
51	30.20				
52	30.70				
53	31.20				
54	31.70	128±0.30	128.4	62.2±0.15	116.4
55	32.20				
56	32.70				
57	33.20				
58	33.70				
59	34.20	140±0.30	140.4	68.2±0.15	124.4
60	34.70				

F

E

D

C

B

A

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL
1						
2						
3						
4						

GENERAL TOLERANCE
.X ±0.30
.XX ±0.20
.XXX ±0.10
PROJECT
Kim Huang

昆旺精密连接器有限公司 VIGORCONN PRECISION CONNECTOR CO.,LTD			
APPROVAL	CHECK	DRAWN	DATA
Kim Huang	Jova Lau	Wuxiaotao	2014/04/20

PART NO F622xx-H20xx0D			
TITLE. 0.5Pitch H=2.0 FPC 掀盖卧式SMT型. 载带			
UNIT	SCALE	NUMBER	REV
MM	1:1	A-000	A