

1 2 3 4 5 6 7 8

F

F

E

E

D

D

C

C

B



B

A


A

Notes:

- 1.Packing Conforms EIA-481-B Standards.
- 2.10 sprocket hole pitch cumulative
- 3.Carrier camber is within 1mm in250mm.
- 4.Marterial:BLACK Polystyrene.
- 5.Packing length per 13"Reel:10.08Meters.
- 6.Component load per 13"Reel:800+40PCS.

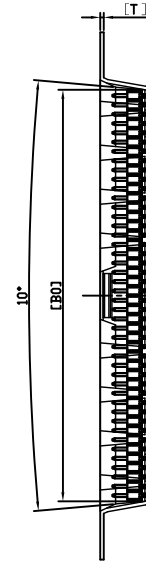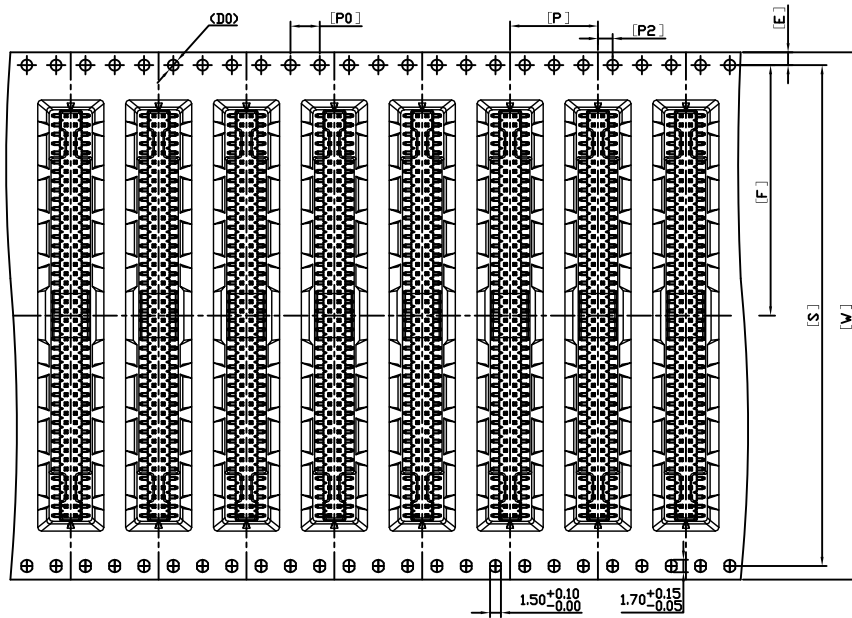

出料方向



W	72.00 ^{+0.30} / _{-0.30}	T	0.50±0.05	Po	4.00±0.10	Ao	5.90±0.10	A1	
S	68.40±0.10	F	34.20±0.30	P2	2.00±0.20	Bo	56.21±0.13	B1	
E	1.75±0.10	P	12.00±0.10	Do	ø1.50 ± 0.10	Ko	7.10±0.15	K1	



DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL
1						
2						
3						
4						

GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.20
X.XXX ±0.10
PROJECT



昆旺精密连接器有限公司
VIGORCONN PRECISION CONNECTOR CO., LTD

APPROVAL	CHECK	DRAWN	DATA
Kim Huang	Jova Lau	Xiao Wen Xuan	2020/06/06

PART NO. 1272WVS-2x44B-6TV01BKC			
TITLE. PH1.27 2X44P SMT H2.0 W3.0 带内柱(0.75x1.0)			
UNIT MM	SCALE 1:1	NUMBER A-00	REV A

1 2 3 4 5 6 7 8