

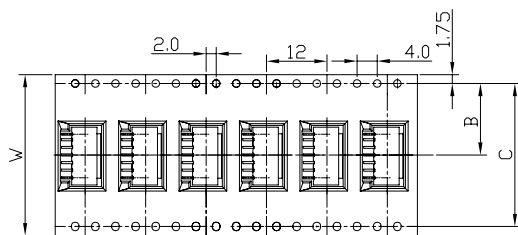
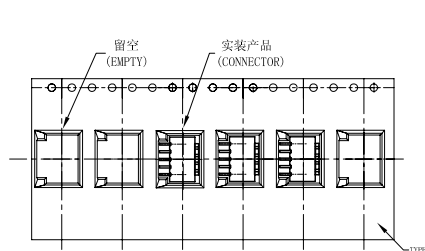


环保物料

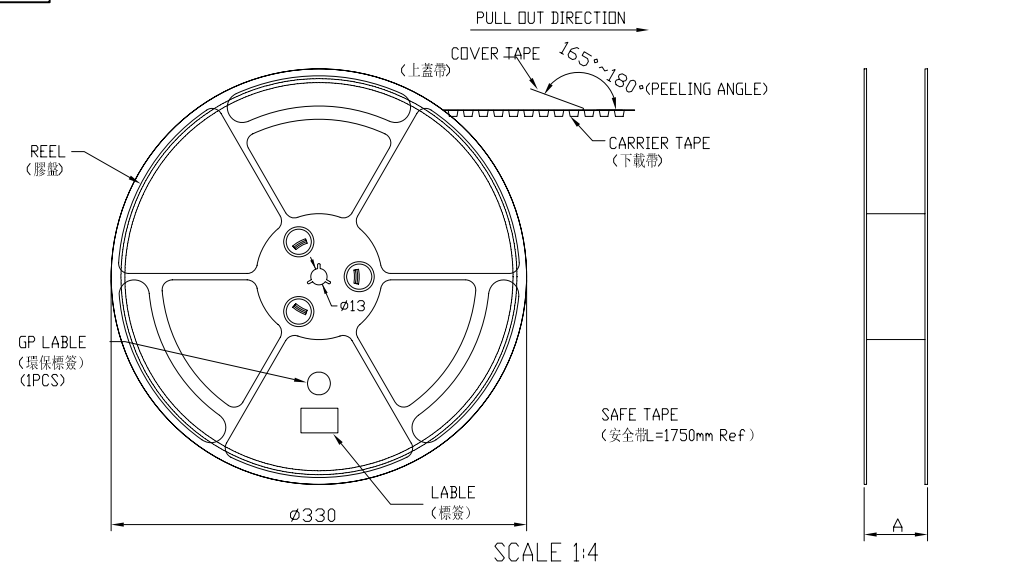



PULL OUT DIRECTION

PULL OUT DIRECTION

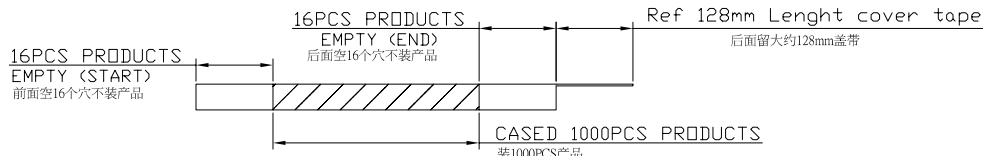

NOTE:

- 1.10 Sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1mm in 100mm.
3. Material: black conductive polystyrene alloy.
4. Material Thickness: 0.3 ± 0.05 mm.
5. All dimensions meet EIA-481-B requirements.
6. 1000pcs Pef Reel.
7. For tape width(dim W)16 and 24mm pilot holes are provided on one sides.
For tape width(dim W)32, 44 and 56mm pilot holes are provided on both sides.

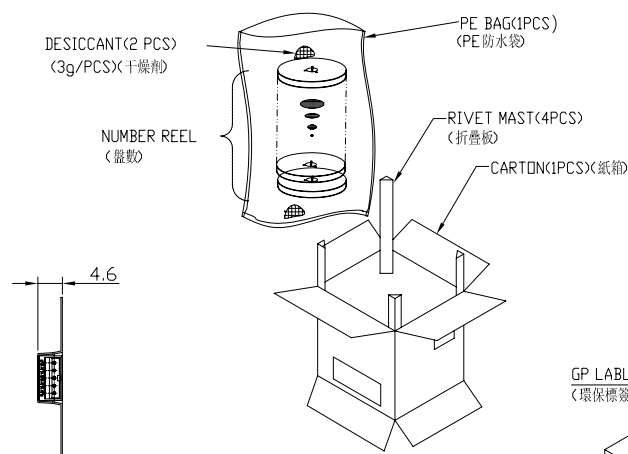

PIN NO.	A	W	B	C	PCS /REEL	REEL/CARTON	SUM(PCS)
2PIN~5PIN	20.5	16	7.50	-	1000	18	18000
6PIN~9PIN	28.5	24	11.5	-	1000	13	13000
10PIN~12PIN	36.5	32	14.2	28.4	1000	8	8000

一般公差
GENERAL TOLERANCE

.X ± 0.3
.XX ± 0.2
.XXX ± 0.1

角法 PROJECT



昆旺精密连接器有限公司
VIGORCONN PRECISION CONNECTOR CO., LTD

料号 PART NO
1511WRS-XX卷装包装图

品名 TITLE
1.50 mm Crimp Style connectors

单位 UNIT
比例 SCALE
图号 NUMBER
版次 REV

2011/09/08

A

B

修改图框格式

日期 DATE

旧版次
OLD REV

新版次
NEW REV

变更内容 DESCRIPTION

审核 CHK

核准 APPD

角法 PROJECT

核准 APPD

审核 CHK

绘图 DR

日期 DATA

刘艳

2007/05/03

单位 UNIT
MM

比例 SCALE
1/1

图号 NUMBER
A-106-1

版次 REV
B