
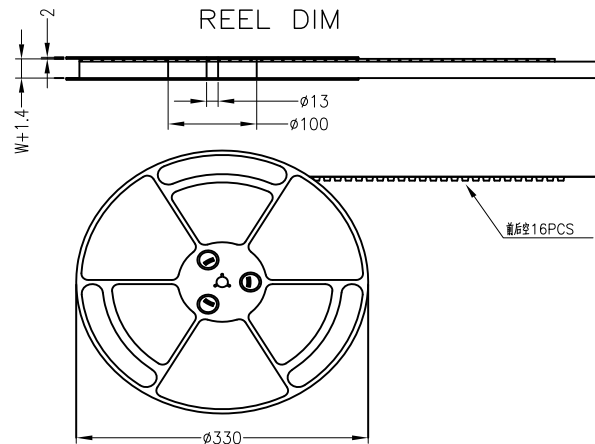
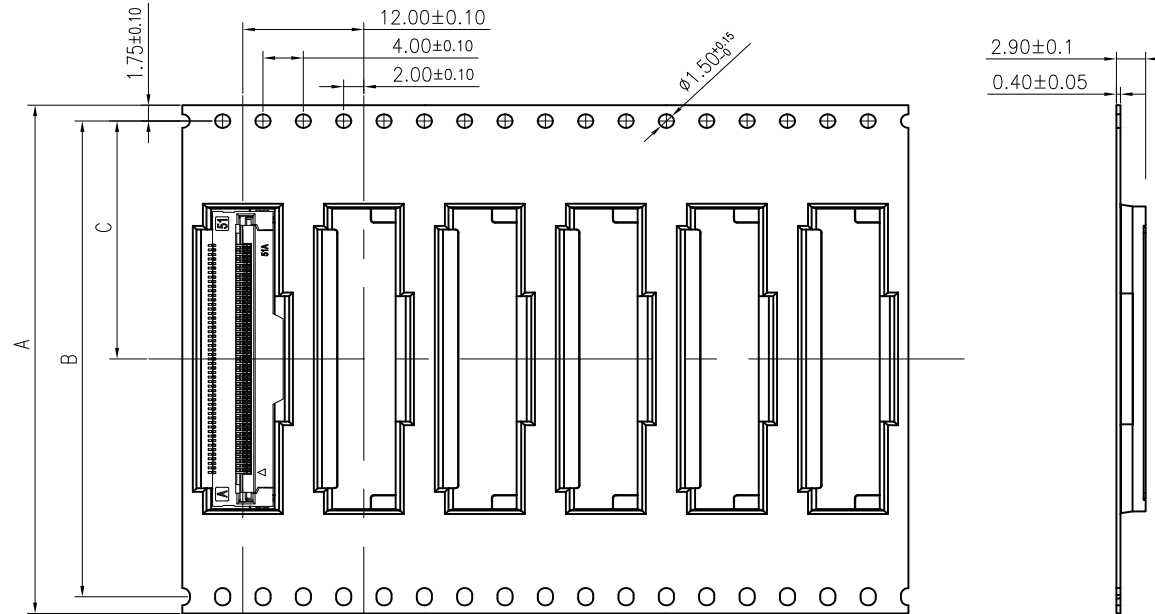
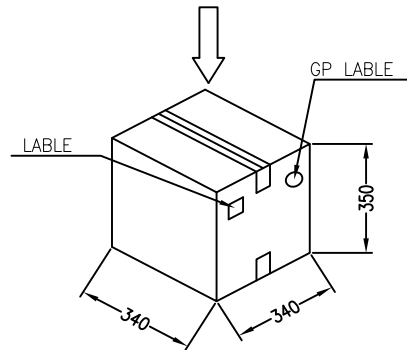
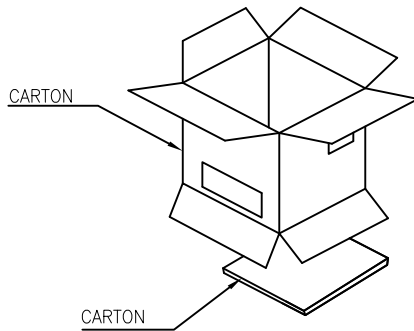


1 2 3 4 5 6 7 8

F

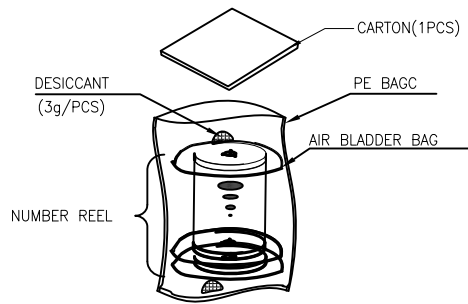

NOTES:

- 1.Component load per 13" reel:2000 pcs
- 2.Material: white conductive polystyrene alloy.
- 3.Thickness:0.4±0.05mm
- 4.All dimensions meet EIA-481-C requirements

No.of Contacts	DIM			REEL (CARTON)	SUM(PCS)
	A	B	C		
51pin	44	20.2	40.4	6	12000

A

								GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED X.X ±0.25 X.XX ±0.20 X.XXX ±0.15 ANG. ±2°	 昆旺精密连接器有限公司 VIGORCONN PRECISION CONNECTOR CO.,LTD				PART NO. F622XX-H22XX0A			
								PROJECT	APPROVAL	CHECK	DRAWN	DATA	TITLE. 0.5PITCH 2.2H FPC LOWER CONTACT R/A SMT CONN.			
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL			Smark	Jacky	Yu wei	2019.09.10	UNIT MM	SCALE 1:1	NUMBER A-000	REV A
1			2			4			5		6		7		8	