

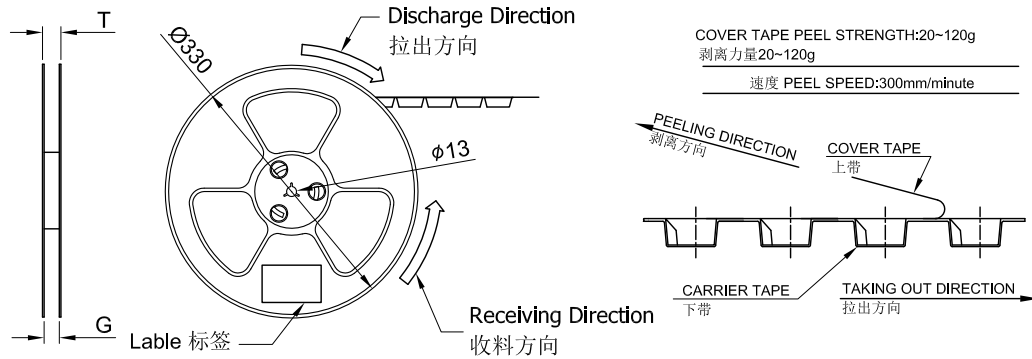


RoHS  Lead-free

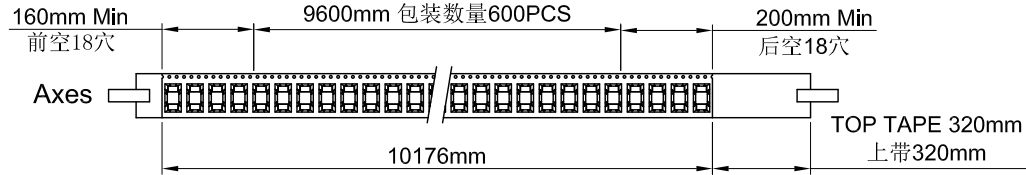


Single hole: None Hole Side  
单孔: 贴无键孔侧  
Double hole: Elliptical Hole Side  
双孔: 贴椭圆孔侧

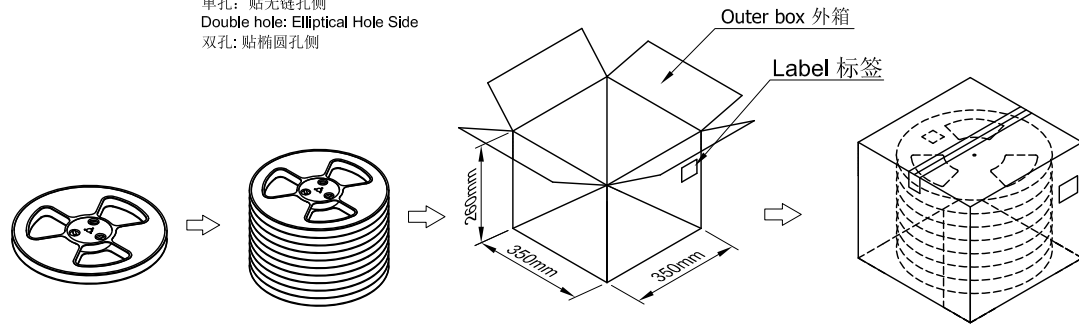

**Note:**

- Carrier Camber Is Within 1mm In 100mm; 带长100mm内容许弯曲度1mm
- 10 Sprocket Hole Pitch Cumulative Tolerance±0.2MM; 圆孔十个孔距离累计允许公差为±0.2mm
- Carrier tape Material for PS; 下带材质为PS材质; Color颜色: Natural透明色
- Bracer保护带; Color颜色: Natural透明色; 厚度0.40mm最小
- Thickness=0.50±0.05; 材料厚度为0.50±0.05mm

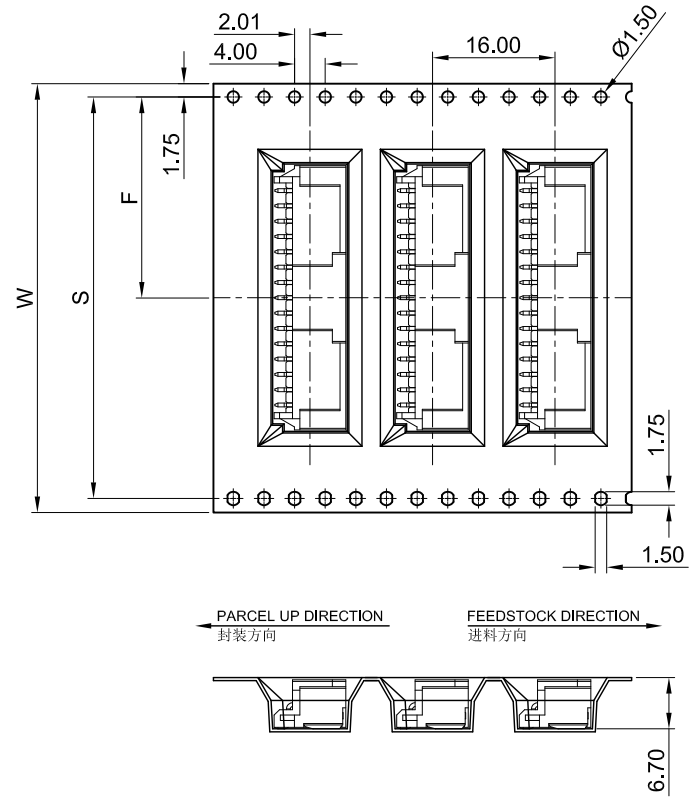

Pin No.	W	S	F	T	G	Cover Tape(W) 上带(宽度)	Carrier Tape(Color) 下带(颜色)	REEL	CARTON	CARTON
								/PCS	/R	/PCS
ZD2008WRS-02	24	-	11.5	28.50	24.50	21.3	透明色	600	8R	4800
ZD2008WRS-03										
ZD2008WRS-04										
ZD2008WRS-05	32	28.4	14.2	36.50	32.50	25.5		600	6R	3600
ZD2008WRS-06										
ZD2008WRS-07										
ZD2008WRS-08	44	40.4	20.2	48.50	44.50	37.5		600	5R	3000
ZD2008WRS-09										
ZD2008WRS-10										
ZD2008WRS-11										
ZD2008WRS-12										
ZD2008WRS-13	56	52.4	26.2	60.50	56.50	49.5		600	4R	2400
ZD2008WRS-14										
ZD2008WRS-15										

GENERAL TOLERANCE  
.X ±0.30  
.XX ±0.20  
.XXX ±0.10

 昆旺精密连接器有限公司  
VIGORCONN PRECISION CONNECTOR CO., LTD

PART NO. PPN: ZD2008WRS-XX  
CPN:2008WRS-XX-XXSWR

TITLE Pitch 2.00 mm 90° Wafer Connectors Package

PROJECT 

APPROVAL CHECK DRAWN DATA  
Alan\_qin 2017/07/17

UNIT SCALE NUMBER REV  
MM 1:1 A-000 A

DATE OLD REV NEW REV ECN DESCRIPTION CHECK APPROVAL