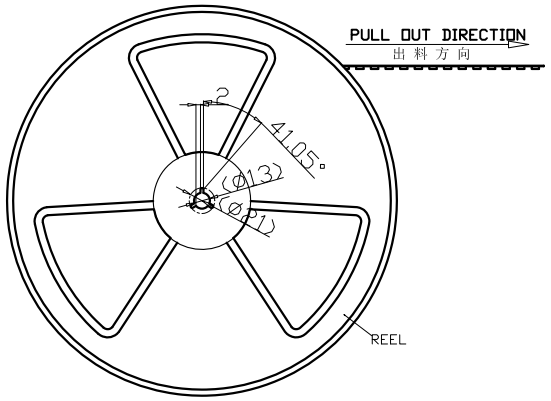

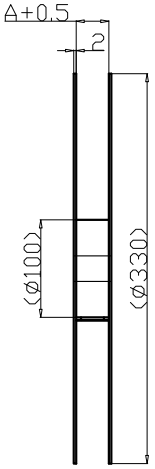

Note:
1.Sprocket holes pitch cumulative tolerance ±0.1.(Accumulative Pitch ±0.2)
2.Carrier camber is within 1mm in 100mm.
3.All dimensions meet EIA-481-D requirements.
4.Thick ness:0.4±0.1mm.
5.Material of top fape:PET,PE,PEF
6.Material of carrier fape:Poystyrene
7.For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A)32mm and 44mm pilot holes are provided on both sides.

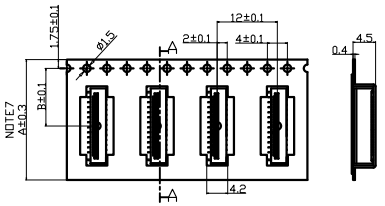

宽度:16mm/24mm 载带

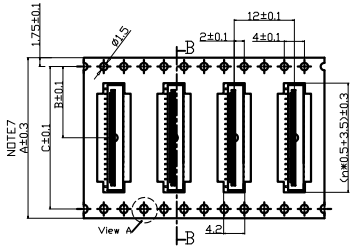

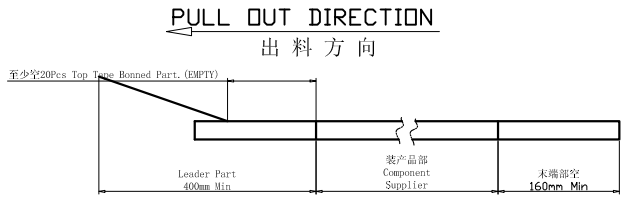

载带带头及带尾尺寸
Lead tape length



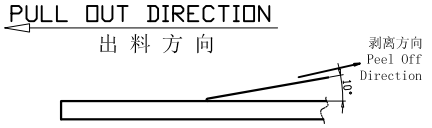

载带上下带剥离强度：0.1N--1.3N(10g-130g)
Peeling off force of top tape:
0.1N--1.3N(10g-130g)

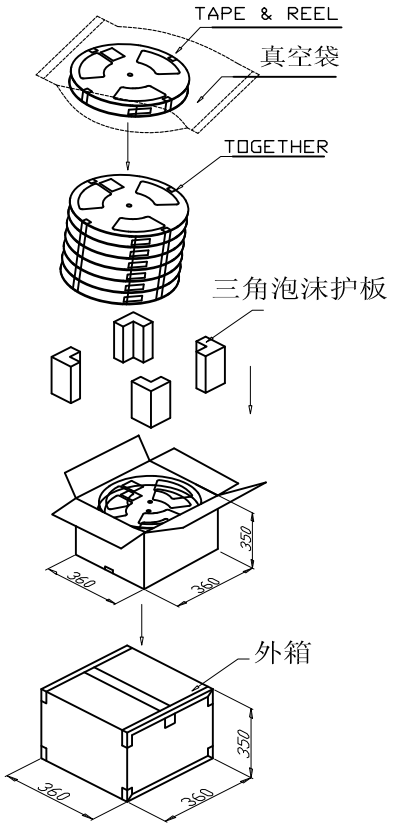

PART No.	F922XX-H1XX0H					
REEL WIDTH		24				
PCS/REEL	1000					
REEL/BOX		12				
BOX/PCS		12K				
CTN. SIZE	360*360*350					

芯数 Pin (n)	PART NO.	尺寸 Size A	B	C
10-26	F922XX-H1XX0H	24.0	11.5	----

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL

GENERAL TOLERANCE
0.X ±0.25
0.XX ±0.12
0.XXX ±0.05
PROJECT

昆旺精密连接器有限公司
VIGORCONN PRECISION CONNECTOR CO.,LTD

APPROVAL	CHECK	DRAWN	DATA
Kim Huang	Jova Lau	Wuxiaotao	2016/06/06

PART NO. F922XX-H1XX0H
TITLE. 0.5mm FPC 立贴式正脚

UNIT	SCALE	NUMBER	REV
MM	1:1	A-000	A