

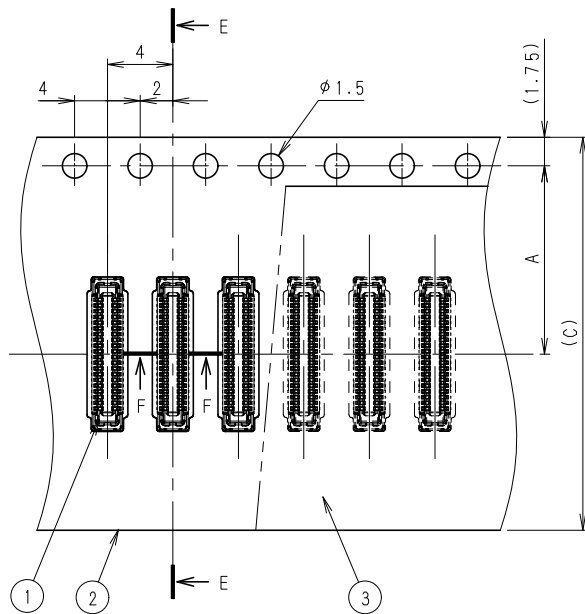



SECT. E-E



SECT. F-F (S=10:1)

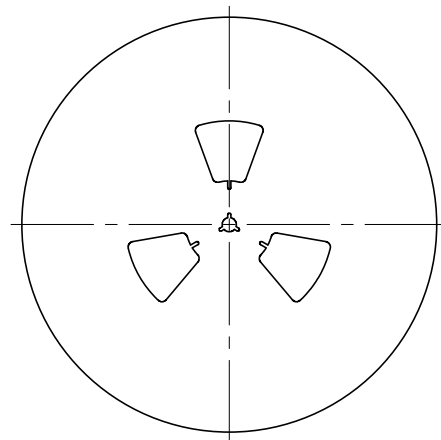


REEL DIMENSION (S=1:5)

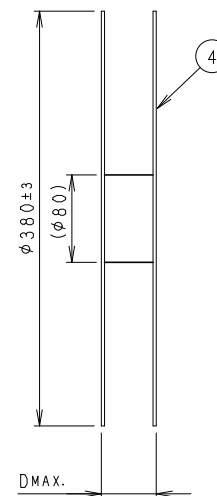


注 記
NOTE

1. PACKING QUANTITY :15000 ea/reel

2. REELING DIRECTION
IN DELIVERY



3. USER DIRECTION OF FEED

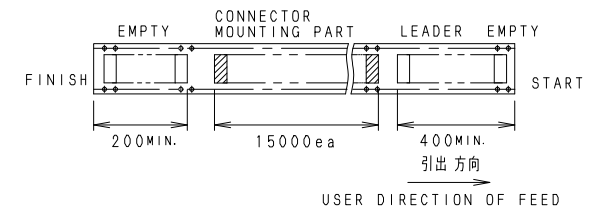

※THIS CHART IS APPLICABLE TO SHEET-2 ONLY.

極 数 NO. OF POS.	A	B	C	D	H
6	5.5	-	12.0	18.4	3.50
10	5.5	-	12.0	18.4	4.20
12	5.5	-	12.0	18.4	4.55
16	7.5	-	16.0	22.4	5.25
18	7.5	-	16.0	22.4	5.60
24	7.5	-	16.0	22.4	6.65
30	7.5	-	16.0	22.4	7.70
34	7.5	-	16.0	22.4	8.40
40	11.5	-	24.0	30.4	9.45
42	11.5	-	24.0	30.4	9.80
44	11.5	-	24.0	30.4	10.15
46	11.5	-	24.0	30.4	10.50
48	11.5	-	24.0	30.4	10.85
50	11.5	-	24.0	30.4	11.20
54	11.5	-	24.0	30.4	11.90
60	11.5	-	24.0	30.4	12.95

NO.	DESCRIPTION	QTY	MATERIAL
1	CONNECTOR	15000	
2	EMBOSSED TAPE	1	POLYSTYRENE
3	TOP COVER TAPE	1	PET
4	REEL	1	POLYSTYRENE



GENERAL
TOLERANCE
X<10 ±0.2
10≤X<30 ±0.25
30≤X ±0.3



昆旺精密连接器有限公司
VIGORCONN PRECISION CONNECTOR CO., LTD


PART NO.
CH586-XXX-0XF

TITLE.
0.35mm PITCH BTB H=0.6 W=1.95



APPROVAL	CHECK	DRAWN	DATA
Kim Huang	Jova Lau	Xiao Wen Xuan	2019/08/15

UNIT MM	SCALE 1:1	NUMBER A-00	REV A
------------	--------------	----------------	----------

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL
1						
2						
3						
4						




SECT. F-F (S=10:1)

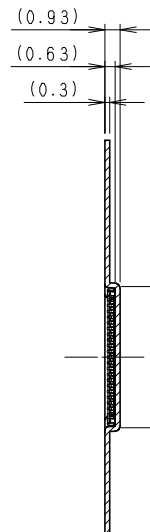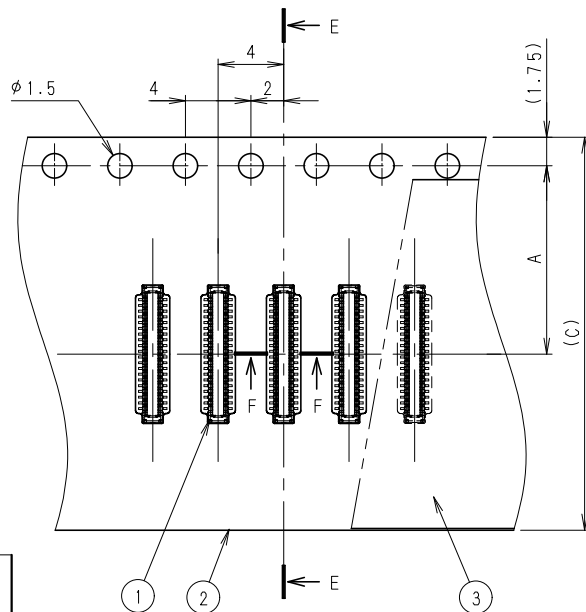


SECT. E-E

注記
NOTE

1. PACKING QUANTITY :15000 ea/reel
2. REELING DIRECTION IN DELIVERY




3. USER DIRECTION OF FEED

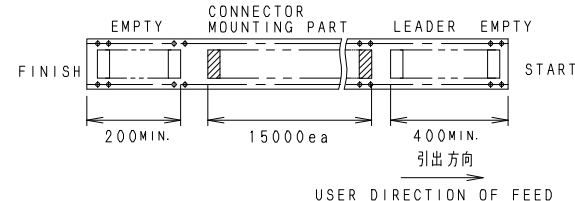


※THIS CHART IS APPLICABLE TO SHEET-1 ONLY.

極 数 NO. OF POS.	A	B	C	D	E	F	G
6	0.70	2.40	3.40	1.80	2.30	1.31	2.82
10	1.40	3.10	4.10	2.50	3.00	2.01	3.52
12	1.75	3.45	4.45	2.85	3.35	2.36	3.87
16	2.45	4.15	5.15	3.55	4.05	3.06	4.57
18	2.80	4.50	5.50	3.90	4.40	3.41	4.92
24	3.85	5.55	6.55	4.95	5.45	4.46	5.97
30	4.90	6.60	7.60	6.00	6.50	5.51	7.02
34	5.60	7.30	8.30	6.70	7.20	6.21	7.72
40	6.65	8.35	9.35	7.75	8.25	7.26	8.77
42	7.00	8.70	9.70	8.10	8.60	7.61	9.12
44	7.35	9.05	10.05	8.45	8.95	7.96	9.47
46	7.70	9.40	10.40	8.80	9.30	8.31	9.82
48	8.05	9.75	10.75	9.15	9.65	8.66	10.17
50	8.40	10.10	11.10	9.50	10.00	9.01	10.52
54	9.10	10.80	11.80	10.20	10.70	9.71	11.22
60	10.15	11.85	12.85	11.25	11.75	10.76	12.27

NO.	DESCRIPTION	QTY	MATERIAL	REMARKS
1	INSULATOR	1	HEAT RESISTING PLASTIC	COLOR:BLACK UL94V-0
2	CONTACT	N	COPPER-ALLOY	Au, Be-Free
3	ANCHOR PLATE	2	COPPER-ALLOY	Au, Be-Free

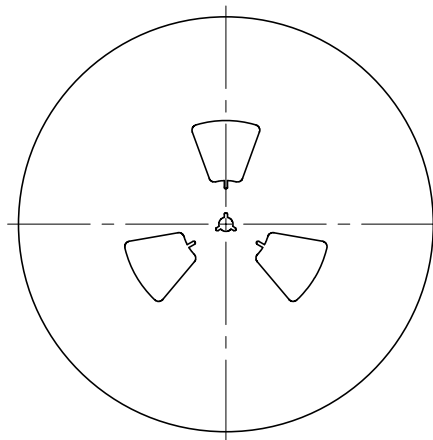

REEL DIMENSION (S=1:5)

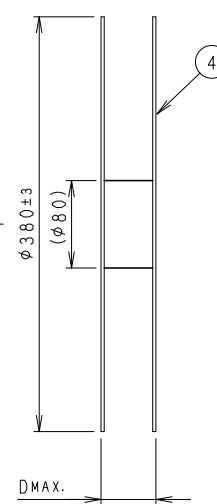

※THIS CHART IS APPLICABLE TO SHEET-2 ONLY.

極 数 NO. OF POS.	A	B	C	D	H
6	5.5	-	12.0	18.4	2.50
10	5.5	-	12.0	18.4	3.20
12	5.5	-	12.0	18.4	3.55
16	7.5	-	16.0	22.4	4.25
18	7.5	-	16.0	22.4	4.60
24	7.5	-	16.0	22.4	5.65
30	7.5	-	16.0	22.4	6.70
34	7.5	-	16.0	22.4	7.40
40	11.5	-	24.0	30.4	8.45
42	11.5	-	24.0	30.4	8.80
44	11.5	-	24.0	30.4	9.15
46	11.5	-	24.0	30.4	9.50
48	11.5	-	24.0	30.4	9.85
50	11.5	-	24.0	30.4	10.20
54	11.5	-	24.0	30.4	10.90
60	11.5	-	24.0	30.4	11.95

NO.	DESCRIPTION	QTY	MATERIAL
1	CONNECTOR	15000	
2	EMBOSSED TAPE	1	POLYSTYRENE
3	TOP COVER TAPE	1	PET
4	REEL	1	POLYSTYRENE

							GENERAL TOLERANCE X < 10 ± 0.2 10 ≤ X < 30 ± 0.25 30 ≤ X ± 0.3	 昆旺精密连接器有限公司 VIGORCONN PRECISION CONNECTOR CO., LTD				PART NO. CH586-XXX-0XM			
						TITLE. 0.35mm PITCH BTB H=0.6 W=1.9									
								APPROVAL	CHECK	DRAWN	DATA	UNIT MM	SCALE 1 : 1	NUMBER A-00	REV A
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL		PROJECT 	Kim Huang	Jova Lau	Xiao Wen Xuan	2019/08/15			