


CARRIER TAPE (S=2/1)

SECTION X-X

BOBBIN (FREE)


2. PACKING SPECIFICATION

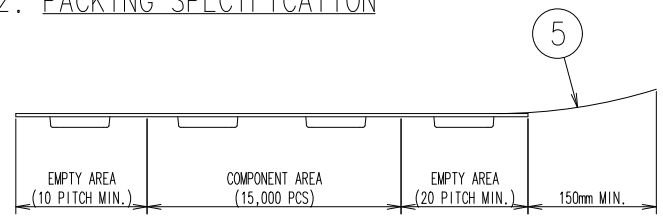

4. CO-PLANARITY OF CONTACTS IS 0.08mm MAX.

3. PEEL STRENGTH : 10~70g

- PEELING SPEED : 300mm/min.
- PEELING ANGLE : 165°~180degree



15,000 PCS/PLASTIC REEL



							<b>GENERAL TOLERANCE</b> .X ±0.30 .XX ±0.20 .XXX ±0.10				<b>PART NO.</b> LS035-XXX-XXF			
							<b>APPROVAL</b> Kim. Huang      Jova      Hekewei      2019/04/27				<b>TITLE.</b> 0.35Pitch 0.6H BTB PLUG CONN			
<b>DATE</b>	<b>OLD REV</b>	<b>NEW REV</b>	<b>ECN</b>	<b>DESCRIPTION</b>	<b>CHECK</b>	<b>APPROVAL</b>	<b>PROJECT</b>	<b>UNIT</b>	<b>SCALE</b>	<b>NUMBER</b>	<b>REV</b>			
1			2			4	⊕	MM	1 : 1	A-000	A			

**昆旺精密连接器有限公司**  
 VIGORCONN PRECISION CONNECTOR CO.,LTD

